


This document is the property of Bharat Electronics, Hyderabad, India. Reproduction, utilization or disclosure to third parties, in any form whatsoever is not allowed without written consent of the proprietors.

1 2 0 100 3 4

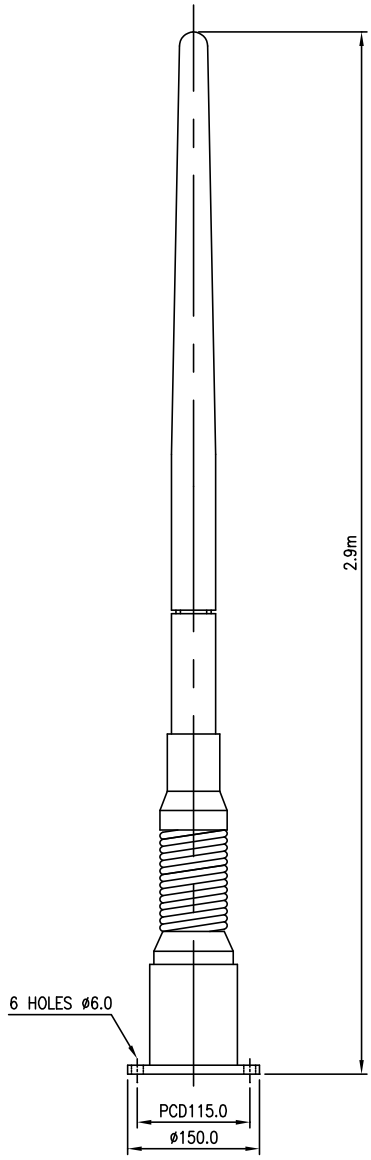

PRODUCT FEATURES:

- . RUGGED FOR TACTICAL APPLICATIONS
- . QUICK ERECTION TIME
- . COMPACT
- . GLASS FIBRE INSULATED RADIATOR

APPLICATIONS:

- . HF MONITORING

SPECIFICATIONS:

ELECTRICAL :	
FREQUENCY RANGE	10KHz-30MHz
NOMINAL INPUT IMPEDANCE	50 Ω
CONNECTOR	BNC FEMALE
H-PLANE 3dB BEAMWIDTH	360°
E-PLANE 3dB BEAMWIDTH	117°
POLARIZATION	VERTICAL
MECHANICAL :	
LENGTH	2.9m
BASE DIAMETER	150mm
WEIGHT (TOTAL)	4kg
MOUNTING METHOD	6x6mm HOLES,PCD-115mm
ENVIRONMENTAL:	
WIND SURVIVAL	120km/hr
TEMPERATURE	-20°C TO +70°C
WATER INGRESS RATING	IP65(NEMA 4X)

METHOD OF DESIGNATION : QUOTE SHORT TITLE,TYPE, 12 DIGIT PART NUMBER AND DRAWING SIZE

EX: ANT HF ACTIVE 9KHz-30MHz | 4767 771 501 44 | A3

PART No. : 4767 771 501 44

OO	10.6.2013	ORIGINAL	BVSK	GRK	GRK						
ISS NO.	CN NO.	DATE	CHANGE			DO	ENGR	APPRD	NUMBER	ITEM	QTY
MATERIAL			FINISH			PROJECTION		NEXT ASSEMBLY			
DRAWN			CHECKED			ENGINEER			DIMNS.		SCALE
BVS K REDDY.						G.Ravikumar			IN mm.		N.T.S
DATE 10.06.2013			DATE			DATE 11.06.13			DOC CODE		NUMBER
						PP			74767 771 5		SHEET
									000		ISSUE
									00		SIZE
									A3		
									HYDERABAD		NO. OF SHEETS
									01		

1 2 0 100 3 4